

Manual monorail stainless steel

Description

For an environment that requires it, food industry, wetlands area or emissions, nuclear, etc. the manual monorail 500 series can be made in stainless steel 304L or 316. All parts : Tracks, curves, switches, trolleys, clamps, may be stainless steel or partially.

Specifications

Rail section height 68mm x width 60mm x thickness 4mm
The trolley has 4 carrier wheels with bearings and 2 side wheels with bearings.

Maximum temperature : 250°C.

Maximum load for 1 trolley : 250 KG

Components

- + Track
- + Curve
- + Switch
- + Retractable track


Specific equipment can be made on request.

For example : integration of special lifting systems, weighing, load bars for transported parts etc.


Assembly conveyor

As for all CONVOYNORT conveyors, delivered components will be assembled on site to each other by bolting, according to the provided assembly drawing. So assembly's opérations are reduced.

Realizations

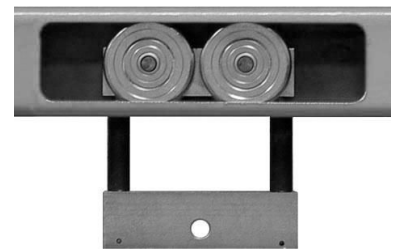

Basic trolley

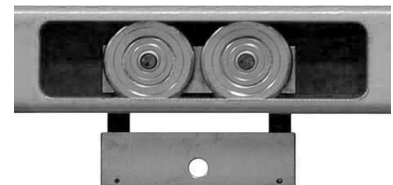

Short trolley




Hoist trolley



Simple trolley

INFORMATION

For some cases, like lateral efforts received by the manual monorail stainless steel, trolleys can be fitted with 2 extra horizontal wheels.

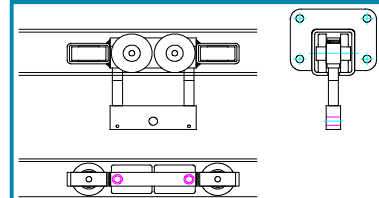

reinforced trolley

This manual monorail can be also organized as conveyor travelling bridge crane.

Convoynort

Headquarters : 625 rue du pont de pierres F- 62400 BETHUNE

Phone : +33(0)3 21 57 53 56 Fax : +33(0)3 21 57 51 07 mail@convoynort.com www.convoynort.com

